

## Z74S-AN | Honeywell fiche




**Moteur pour rinçage automatique**  
Réf Z74S-AN

**173.09€<sup>TTC\*</sup>**

Voir le produit : <https://www.domomat.com/34970-moteur-pour-rincage-automatique--honeywell-z74s-an.html>


*Le produit Moteur pour rinçage automatique  
est en vente chez Domomat !*



## Z74S-AN

Reverse rinsing actuator with bayonet connection  
for fully automatic filter cleaning

### Product specification sheet

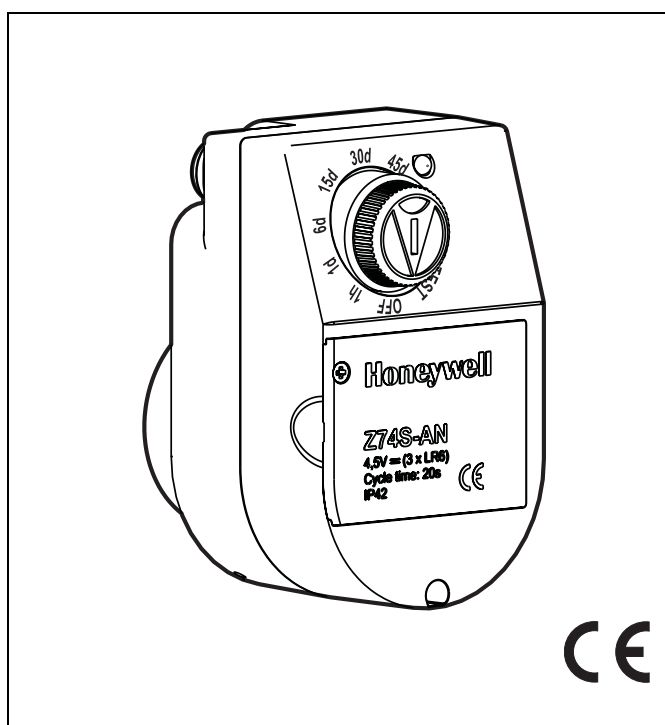

#### Construction

The automatic reverse rinsing actuator consists of:

- Drive
- Power supply unit
- LR6 AA batteries (3 pcs)

#### Reverse Rinsing

Filter size	Discharge connection	Reverse rinsing volume*
1/2" and 3/4"	DN 50	10 litre
1" and 1 1/4"	DN 70	12 litre

\*at 4 bar inlet pressure and 20 seconds reverse rinsing duration

#### Application

The Z74S-AN automatic reverse rinsing actuator provides fully automatic cleaning for Honeywell filters F74CS, FN74CS and filter combinations FK74CS, FKN74CS. A bayonet connection enables fitting the Z74S-AN without tools.

The reverse rinsing interval can be set to 8 different intervals

#### Special Features

- Bayonet connection enables fitting without tools
- 8 reverse rinsing intervals
- Battery operation
- Manufactured with integral noise suppression


#### Range of Application

For fully automatic reverse rinsing of Honeywell filters F74CS, FN74CS and filter combinations FK74CS, FKN74CS.

Medium	Water
Water temperature	Max. 30 °C
Ambient conditions	5...80% non-condensing, 0...40 °C

#### Technical Data

Reverse rinsing interval adjustable to	1 hour / 1 day / 6 days / 15 days / 30 days / 45 days / 2 months / 3 months
Open/closing time	20s
Supply voltage	<ul style="list-style-type: none"> <li>• Battery operation 4.5V DC +5/-20%</li> <li>• Power supply unit 3 AA batteries 1.5 volt, LR 6 (alkali manganese) 230V/50Hz – 6V/500mA</li> </ul>
Battery display	LED – flashes when voltage is under 3.6V
Protective class	IP42

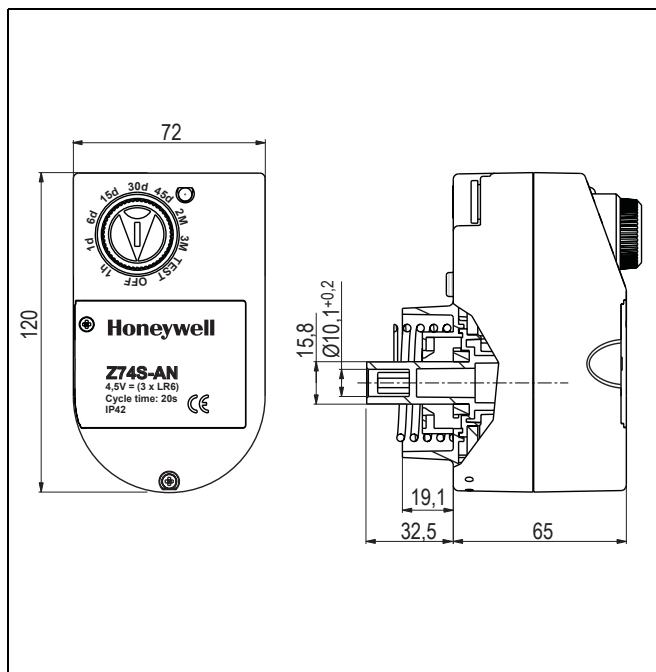

### Method of Operation

After the set time has expired, the Z74S-AN opens the ball valve. In the filter, a differential pressure is generated by this opening procedure, which in turn starts the reverse rinsing mechanism. At the end of the reverse rinsing interval, the ball valve closes again. An additional safety function prevents the ball valve from being opened if the battery voltage is too low. This ensures that unwanted loss of water is avoided. The end of the battery service life is indicated by the flashing of the LEDs.

### Options

Z74S-AN = with bayonet connection

### Installation Guidelines

- The installation site has to be frost-proof and the protection of the device from chemicals, paints, detergents, solvents and their vapours and environmental influences must be guaranteed.

### Automation and Control Solutions

Honeywell GmbH  
 Hardhofweg  
 74821 MOSBACH  
 GERMANY  
 Phone: (49) 6261 810  
 Fax: (49) 6261 81309  
 www.honeywell.com

Manufactured for and on behalf of the  
 Environmental and Combustion Controls Division  
 of Honeywell Technologies Sàrl, Z.A. La Pièce 16,  
 1180 Rolle, Switzerland by its Authorised Repre-  
 sentative Honeywell GmbH

EN0H-1153GE23 R0911  
 Subject to change without notice  
 © 2011 Honeywell GmbH

**Honeywell**