

93110797 - Tungstram



**Ampoule LED Tungstram - 7W -
3000K - 550lm**

Réf 93110797

2.08€^{TTC*}

Voir le produit : <https://www.domomat.com/63991-ampoule-led-tungstram-7w-3000k-550lm-tungstram-93110797.html>

*Le produit Ampoule LED Tungstram - 7W - 3000K - 550lm
est en vente chez Domomat !*





7

kWh/1000h

79

lumens/watt

LED Stik G5

@LED 7/STIK/830/100-240/E14/F 1/15
TU

93110797

Product information

LED Stik illuminates spaces with light instantly. Its sleek cylindrical shape fits in place of a traditional incandescent bulb and some sockets where a traditional bulb or CFL doesn't fit. Replace a 40W, 60W, 75W & 100W incandescent with an LED Bright Stik and keep saving for the next 15 years*. That's a long time you can spend not worrying about light bulbs.

Features & benefits

- LED technology for energy saving
- Redesigned shape with multiple advantages:
- To fit in more fixtures compared to CFL
- Optimised for omni-directional light distribution
- Space-saving benefits on-shelf
- 240 degree Beam angle
- Replaces a standard 40W, 60W, 75W & 100W bulb
- Rated life of 15 years*
- 3 colour options - 3000K, 4000K & 6500K
- Always ready - instant brightness
- No mercury - worry-free use and disposal

- Warranty: 2 years with maximum 8 000 burning hours according to Tungsram Standard Warranty conditions
 - Based on 2.7 hours of per day use.
-

Product data

Product Code	93110797
Direct Shipment pair	93057190 - LED 7/STIK/830/100-240/E14/F 1/15 TU DS
Bulb Shape	T32
Bulb Finish	White
Bulb maximum overall diameter [mm]	32
Nominal Length [mm]	103
Net weight per piece [g]	32
Dimmability	No
RoHS compliant	Yes
Brand	Tungsräm
Cap/Base	E14

Performance data

Nominal/ Rated Beam Angle [°]	240
Rated Lumens [lm]	550
Weighted energy consumption [kWh/1000h]	7.0
Rated efficacy [lm/W]	78.57
Rated life L70/B50 [h]	10000
Nominal correlated colour temperature (CCT) [K]	3000
Nominal lumens [lm]	550
Colour Rendering Index (CRI) [Ra]	80


Electrical data

Operating Temperature (MIN) [°C]	-20°C
Operating Temperature (MAX) [°C]	+40°C
Starting time (sec)	<0,5 s
Power Factor	>0.5
Warm up time up to 60% of full light output	Instant on
Number of switching cycles	100000
Nominal lamp voltage range [V]	100-240V
Nominal power [W]	7

Logistic data

Shipment	Standard
DUN Code	15994100028618
EAN Code	5994100028611
Pack Quantity	15
Product status	Marked for phase-out

Light distribution

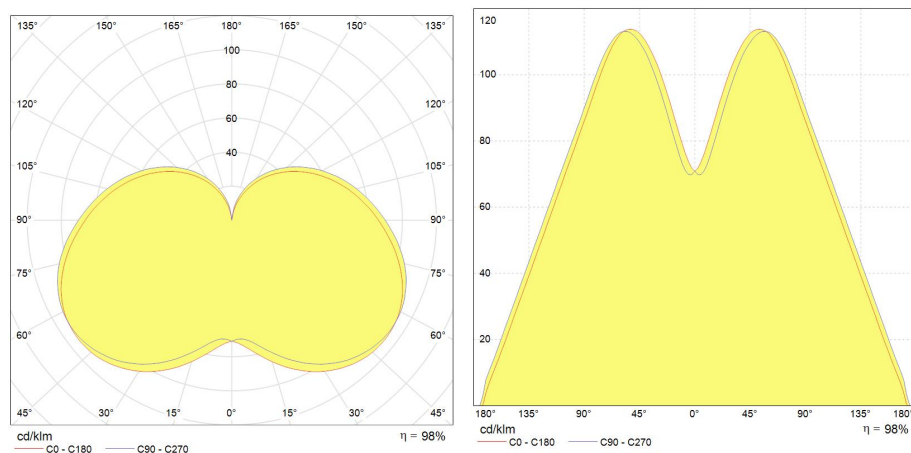

Downloads & Links

[Go to the catalog site \(HTTP\)](#)

[Photometry \(IES\)](#)

[Datasheet \(PDF\)](#)

[Images \(HTTP\)](#)

[Declaration of Conformity \(PDF\)](#)

