

Capteur OLS7 |Cynergy 3




**Capteur de niveau de liquide optique
OLS7 RS Pro - 7 bar - montage sur
châssis**

Réf 780-0311

84.31€^{TTC*}

Voir le produit : <https://www.domomat.com/56660-capteur-de-niveau-de-liquide-optique-ols7-rs-pro-7-bar-montage-sur-chassis-rs-pro-780-0311.html>

*Le produit Capteur de niveau de liquide optique OLS7 RS Pro - 7 bar - montage sur
châssis
est en vente chez Domomat !*





RS stock numbers : 7800311, 7800315, 7800333, 7800337



OLS7 Series

Optical liquid level sensor 1/4"NPT mount



The OLS7 series is a liquid level sensor for single point liquid level detection.

The sensor has an infra-red emitter and detector aligned within an accurately shaped cone to give good optical coupling when the sensor is in air. This coupling is greatly reduced, when the sensor is immersed in liquid, as the infra-red light escapes through the liquid rather than being reflected back to the detector.

The sensor has a transistor output, so can be configured by the user for particular applications.

- **Low cost sensors for general liquid sensing**
- **High reliability optical sensing**
- **External mount via 1/4"NPT thread**
- **Standard temperature range -25°C to +80°C**
Extended temperature range -40°C to +125°C
- **High and Low output versions**

Technical Specification

Mounting style	External	Cable length - standard	25cm
Mounting thread	1/4"NPT	Wire size	24AWG
Body material	Polysulfone UDEL 1700	Cable conductor material	Tinned copper
Temperature Range	-25 to +80°C/-40° to +125°C	Wire sheath material	PTFE
Maximum pressure	7bar	Wire temperature rating	125°C
Tightening torque for fixing	1.5Nm/13.26lbs in	Sealing gasket	Not supplied

Electrical Specification




Supply Voltage (Vs)	Vdc	4.5 to 15.4	or	10 to 28
Supply Current Max (Is)	mA	2.5 (Vs = 15.4Vdc)		
Output type		Voltage High or Low		
Output Voltage (Vout) @ Iout=100mA		Output High Vout = Vs-1V max		Output Low Vout = 0.5Vmax
Output Sink & Source Current Iout		100mA max	or	1A

Sensor connections Red= supply +ve, Blue= common(0V), Green= Output (see diagrams overleaf)

RS Stock No.	Standard Parts	Mount	Temp Range °C	Supply Volts V	Output
7800311	OLS700D3SH	1/4"NPT	-25 to +80	5 to 15dc	High in air Volts
7800315	OLS700D3LSH	1/4"NPT	-25 to +80	5 to 15dc	Low in air Volts
	OLS710D3SH	1/4"NPT	-40 to +125	5 to 15dc	High in air Volts
	OLS710D3LSH	1/4"NPT	-40 to +125	5 to 15dc	Low in air Volts
7800333	OLS710D324-003	1/4"NPT	-40 to +125	10 to 28dc	High in air Open drain
7800337	OLS710D3L24-003	1/4"NPT	-40 to +125	10 to 28dc	Low in air Open drain

Custom versions can be made for particular applications. Please contact Cynergy3 with your requirements.

Mechanical Dimensions

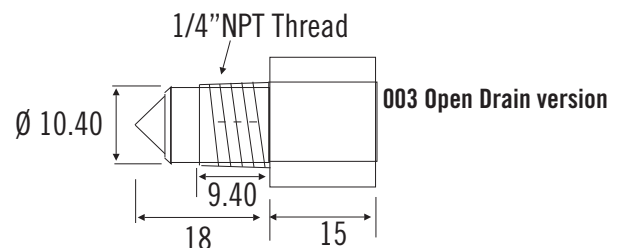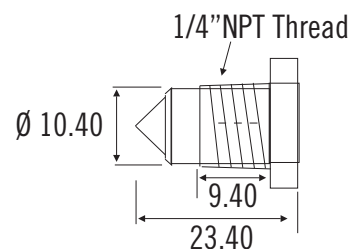

Cynergy3 Components Ltd.
7 Cobham Road
Ferndown Industrial Estate
Wimborne, Dorset BH21 7PE
Telephone +44 (0) 1202 897969

Email:sales@cynergy3.com

ISO9001 CERTIFIED

OLS7 RS 2017



www.cynergy3.com



RS stock numbers : 7800311, 7800315, 7800333, 7800337



OLS7 Series

Optical liquid level sensor 1/4"NPT mount

Installation

The sensor can be mounted in either the side or the bottom of a tank. It must not be mounted in the top of a tank with the cone downwards.

This sensor requires a 1/4"NPT thread socket connection.

The sensor should be screwed into the 1/4"NPT socket but should not be overtightened.


Cleaning

Proper fluids should be selected based on the type of contamination to be removed. It is recommended that freon or alcohol based solvents are used. DO NOT USE chlorinated solvents such as trichloroethylene as these are likely to attack the sensor housing material.





Liquid Media Compatibility

Check that the fluid in which you wish to use the sensor is compatible with Polysulfone.

Installation in 1/4"NPT socket

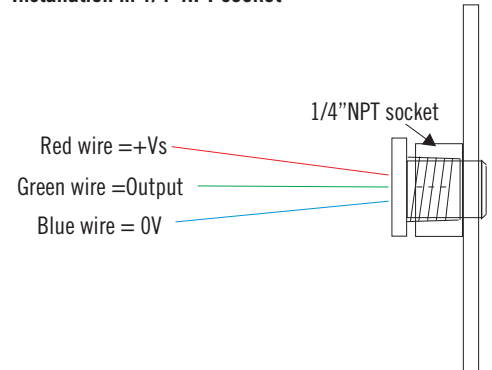

Electrical Connections

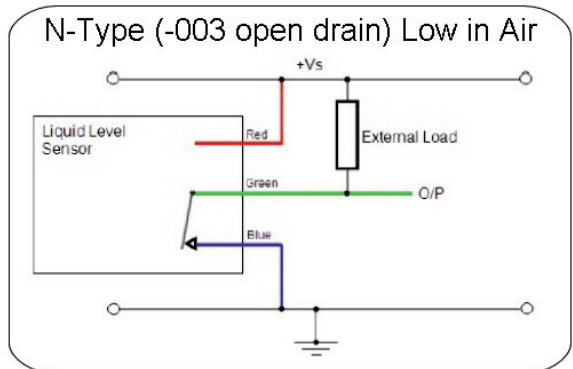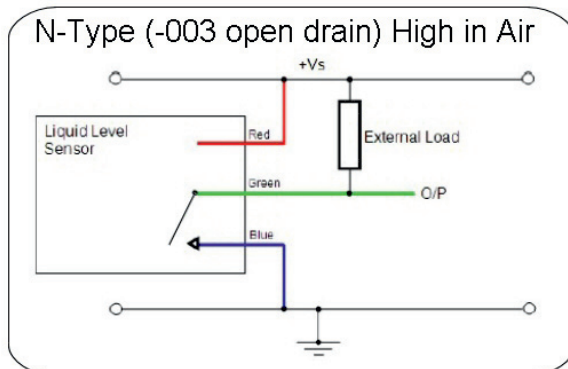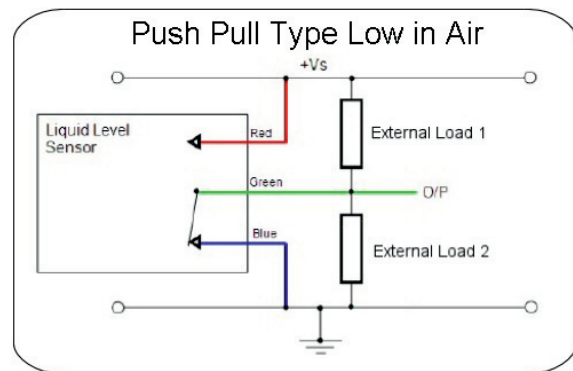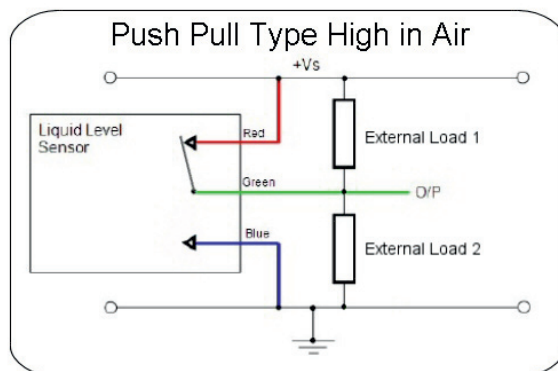

Cynergy3
7 Cobham Road
Ferndown Industrial Estate
Wimborne, Dorset BH21 7PE
Telephone +44 (0) 1202 897969
Email: sales@cynergy3.com

ISO9001 CERTIFIED

www.cynergy3.com